





STANDARDS COMMITTEE FOR HI-LOK® HI-TIGUE® PRODUCTS

2600 SKYPARK DRIVE, TORRANCE, CALIFORNIA 90509 U.S.A.

HI-SHEAR CORPORATION, U.S.A. --- (Patent Holder) --- U.S. Federal Code No. 73197 Division of Hi-Shear Industries Inc., U.S.A.	HI-SHEAR FASTENERS EUROPE, LTD., U.K. --- (Licensee) Division of Hi-Shear Industries Inc., U.S.A.
AIR INDUSTRIES CO., INC. --- (Licensee - U.S. & Canada) --- U.S. Federal Code No. 06726	Huck International, GmbH & Co. Germany --- EEC Countries (Licensee -
HUCK International, Deutsch Operations (Licensee) --- U.S. Federal Code No. 97928	ST. CHAMOND GRANAT, S.A. France --- EEC Countries (Licensee -
SPS TECHNOLOGIES, U.S.A. --- (Licensee) --- U.S. Federal Code No. 56878	SIMMONDS, S.A. France --- EEC Countries (Licensee -
VOI-SHAN, Division of VSI Corp., U.S.A. --- (Licensee) --- U.S. Federal Code No. 92215	TOKYO SCREW COMPANY, Japan --- EEC Countries-Collars (Licensee - Japan)
WEST COAST AEROSPACE INC., U.S.A. --- (Licensee) --- U.S. Federal Code No. 60516 (Pins & Steel Collars)	



INDENTED HEAD MARKING MAXIMUM DEPTH .010"
"hs" or "H" or no letter indicates HI-SHEAR trademark.
"VS" indicates VOI-SHAN trademark.
"SPS" indicates STANDARD PRESSED STEEL trademark.
The number or numbers following the trademark indicate first dash number.

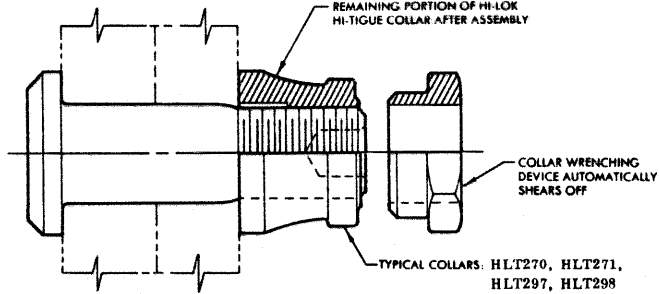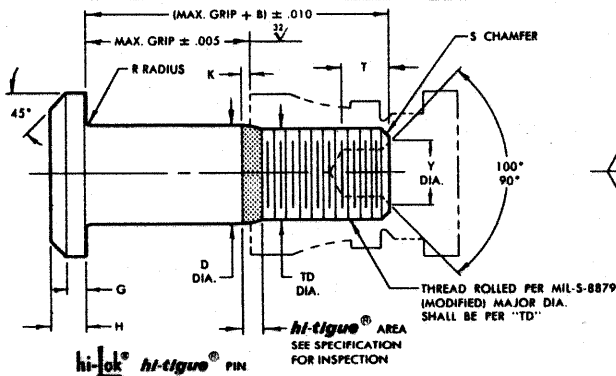

FIRST DASH NO.	NOM. DIA.	A DIA.	B REF.	D DIA.		TD DIA.	G REF.	H	K REF.	R RAD.	S CHAMFER REF.	THREAD	SOCKET			TENSION POUNDS MINIMUM	TENSION POUNDS MINIMUM
				WITHOUT HI-KOTE™ LUBE	WITH HI-KOTE™ LUBE								W HEX.	T DEPTH	Y DIA.		
5																	
NOTE: Use HLT40-6																	
6	7/32	.315 .295	.360	.2182 .2177	.2182 .2172	.1840 .1810	.025	.055 .045	.020	.025 .015	1/32" x 45°	10-32UNJF-3A Modified	.0806 .0791	.100 .080	.119 .104	7,100	2,500
8	9/32	.412 .387	.435	.2807 .2802	.2807 .2797	.2440 .2410	.030	.069 .059	.025	.025 .015	1/32" x 45°	1/4-28UNJF-3A Modified	.0967 .0947	.110 .090	.142 .122	11,800	4,300
10	11/32	.505 .475	.545	.3432 .3427	.3432 .3422	.3060 .3020	.035	.078 .068	.031	.030 .020	3/64" x 45°	5/16-24UNJF-3A Modified	.1295 .1270	.130 .110	.180 .160	17,600	6,300
12	13/32	.600 .565	.590	.4057 .4052	.4057 .4047	.3680 .3640	.040	.088 .078	.037	.030 .020	3/64" x 45°	3/8-24UNJF-3A Modified	.1617 .1582	.160 .140	.217 .197	24,600	8,700
14	15/32	.676 .641	.690	.4682 .4677	.4682 .4672	.4310 .4260	.045	.105 .093	.039	.030 .020	3/64" x 45°	7/16-20UNJF-3A Modified	.1930 .1895	.190 .170	.253 .233	32,700	12,100
16	17/32	.770 .735	.740	.5307 .5302	.5307 .5297	.4930 .4880	.050	.116 .103	.045	.030 .020	3/64" x 45°	1/2-20UNJF-3A Modified	.2242 .2207	.220 .200	.289 .269	42,000	15,300
18	19/32	.864 .829	.825	.5927 .5922	.5927 .5917	.5550 .5500	.055	.127 .112	.043	.040 .025	1/16" x 45°	9/16-18UNJF-3A Modified	.2555 .2520	.260 .240	.326 .306	52,400	19,000

SEE COLLAR STANDARDS FOR COLLAR STRENGTHS. LOWER STRENGTH (PIN OR COLLAR) DETERMINES SYSTEM STRENGTH.

GENERAL NOTES:

- Concentricity: "A" to "D" diameter within .010 FIR.
- Surface texture per ANSI B46.1.
- Hole preparation per NAS618.

CODE:

First dash number indicates nominal diameter in 1/32nds of the pin which HLT240 oversize pin replaces.
Second dash number indicates maximum grip in 1/16ths.
See Finish note for explanation of code letters.

MATERIAL:

A-286 high temperature alloy per AMS5731 or AMS5737.

HOW TO ORDER EXAMPLE:

HEAT TREAT:

95,000 psi shear minimum at 70°F.


FINISH:

- HLT240-()-() = Passivate per Hi-Shear Spec. 258 and cetyl alcohol lube per Hi-Shear Spec. 305.
- HLT240TB-()-() = Hi-Kote 2 solid film lube per Hi-Shear Spec. 292 and cetyl alcohol lube per Hi-Shear Spec. 305.
- ① HLT240TC-()-() = Hi-Kote 2 solid film lube per Hi-Shear Spec. 292, except top surface of head shall be uncoated, and cetyl alcohol lube per Hi-Shear Spec. 305.


SPECIFICATION:

Hi-Lok Hi-Tigue Product Specification 342 and 342-2.

Pin Part Number Only
HLT240-8-8



Pin and Collar Assembly Part Number Combination
HLT240270-8-8



"Hi-Lok", "HL", "Hi-Tigue", and "HLT" are internationally registered trademarks of Hi-Shear Corporation.		
DRAWN	DATE	TITLE
Van	6-14-72	HI-LOK® HI-TIGUE® PIN PROTRUDING SHEAR HEAD A-286 HIGH TEMPERATURE ALLOY 1/16" GRIP VARIATION, 1/32" OVERSIZE
APPROVED	DATE	DRAWING NUMBER
J. Wilcox	6-19-72	HLT240
REVISION	DATE	
①	J.F. Obispo 8-23-94	

HLT240